



## Setup Guide RX-AP2



### Kit Items Included:

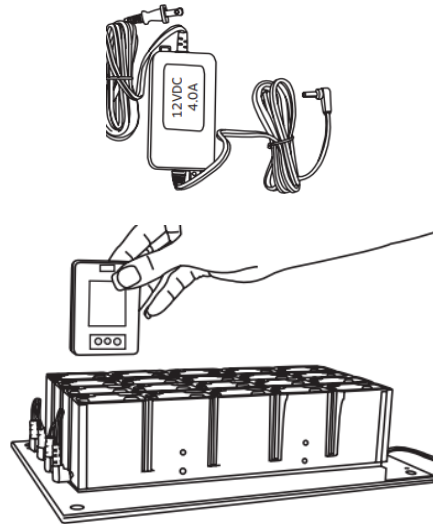

### StartUp Screen:

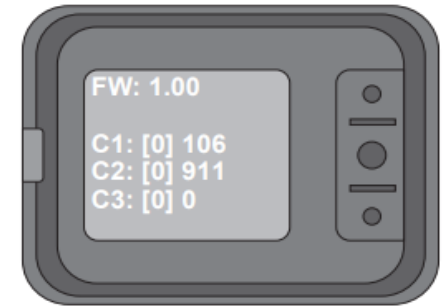

1. Connect High Current charger to 12V DC power brick

Fold Here -----


3. Insert RX-AP2 with 3 button pins same side as charger BLUE LED  
Allow pagers to charge for several hours
4. Allow pagers to charge for several hours
5. Top LED on Pager will flash every 5 seconds - PURPLE during charge and GREEN when battery full.
6. Remove pager, it does not have to be fully charged
7. Main Screen Top Strip Firmware Version display

9. Three Cx: Values are programming codes
10. Otherwise main screen with Pager Number is displayed
11. If groups are programmed they will show on next screen.
12. On main pager screen:
13. Battery % Indicator in top strip right corner
14. And If enabled Date/Time in bottom strip

### Buttons:

1. Bottom Button displays pager menus
2. Top Button displays Stored messages
3. Center Button makes a selection
4. Inside a menu top/bottom buttons move up/down
5. Holding the top or bottom button for 1 second will change to a page movement.
6. Holding either top or bottom button down for 2 seconds will return to previous menu

### Menu Screen:

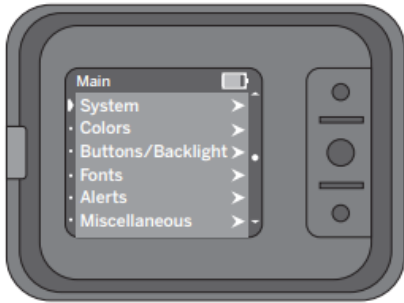

1. Bottom Button brings up menu screen
2. Menu details can be found in AP2 manual at
3. <https://support.lrsus.com>

### Stored Messages Screen:



1. Top Button brings up Stored messages

2. Top/Bottom Buttons move up/down
3. Holding Top/Bottom button for 1 seconds pages up/down
4. Holding Top/Bottom button for 2 seconds returns to previous menu
5. Center Button selects message
6. Holding center button until a "X" appears and releasing deletes selected message

Fold Here -----

