




USER MANUAL

LRS E467

Alphanumeric Paging System

MODELS: RX-E467

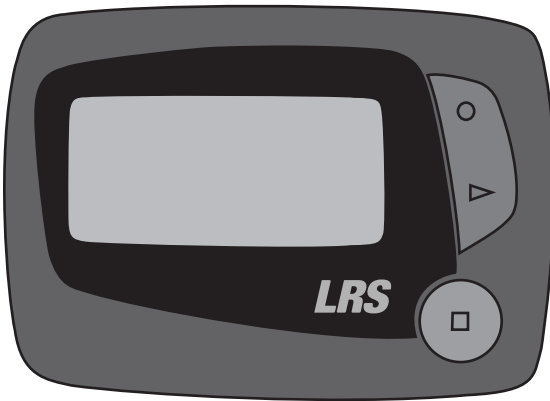


Long Range Systems, LLC.

LRSUS.COM | 800.437.4996 | 214.553.5308


USER INSTRUCTIONS

Features

- 1 Primary Address
- 1 All Call Address
- 5 Group Addresses
- Stores 25 messages
- Adjustable LCD contrast level
- Message received time displayed
- Receive alert selectable
- Unread message indicator
- Backlight
- Low Battery indication
- Auto on/off
- Encryption

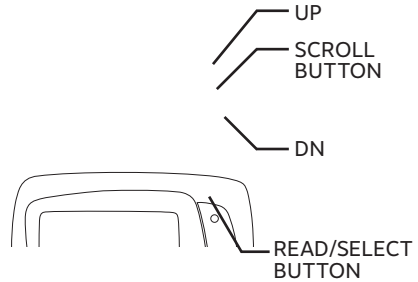

Menus

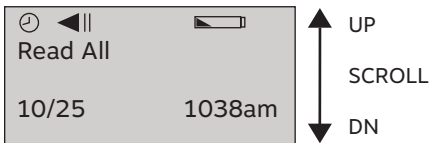

Selecting functions

1. To select, Press Scroll Dn (or Up) until desired item shows.
2. Press Read/Select button to select
3. Press scroll button (Up or Dn) to adjust
4. Then press Read/Select to finish

Basic Operations

- Power On/Off
- Read Messages
- Delete Messages

Power On/Off


1. Set ON (if unit is off)

2. Press and hold Scroll Up until YES NO shows.
3. At Power ON? Select YES.
4. Press Read/Select button.

Set OFF

1. Select Power OFF?.
2. Select YES/No
3. Press Read/Select one time

Read Message



1. Press scroll (Up or DN) to start reading messages
2. Continue pressing scroll to go up or down through messages

ADVANCED OPERATIONS

- | | |
|----------------|--------------|
| Assign Tables | Auto ON/OFF |
| Set Alert Mode | Set Contrast |
| Set Time/Date | Set Keytone |

Select Alert Mode

- Select Set Alert Mode
- Select Beep
- Select Loud or Soft
- Select Duration
- Select Vibe
- Select Strong or Weak
- Select Pulse Type
- Select Duration
- Select Both
- Select Strong or Weak
- Select Duration

Set Time/Date

1. Select Set Time/Date
2. Press Read/Select button
3. Press Scroll to set each time or date segment and press Read/Select to move through the segments

Auto ON/OFF

Sets the time of day the pager will automatically wake up and go to sleep.

1. Select Auto On/Off
2. Press Read/Select button
3. Select ON or OFF
4. If ON, use scroll button to set ON time and press select to move between hour, minute, AM/PM

Set Contrast

1. Select Set Contrast
2. Press Read/Select
3. Scroll DN/UP to adjust

Set Keytone On/Off

1. Select Set Keytone
2. Press Read/Select
3. Select On or Off
4. Press Read/Select to set

ENCRYPTION

Encryption is a feature built into the pager designed to meet HIPAA security requirements. It is keyed by settings and codes on LRS transmitters. When encryption is used the pager must be programmed from the encrypted transmitter.

PRECAUTIONS

- Keep unit dry
- Don't self repair
- Do not overheat in sunlight
- Don't drop
- Don't use sharp objects on screen

CLEANING

Use isopropyl alcohol only to clean

1. Take clean cloth and isopropyl alcohol based cleaner
2. Wet the cloth with the isopropyl cleaner
3. Wipe down pager

SERVICE QUESTIONS AND ANSWERS

What to do if the system malfunctions

Should your paging system ever fail to function properly, refer to the previous troubleshooting section. If you've followed all the steps and requirements and your system is still inoperable, you may submit a support request at support.LRSUS.com or call Long Range Systems at (800) 437-4996 Monday through Friday 8:30 am to 5:00 pm Central Time.

For after hours inquiries, please follow the instructions on the support line. LRS Customer Support will return the call as soon as possible. Please keep in mind that options are limited over the weekend.

System Repair After Warranty Expiration

Call Long Range Systems before sending a non-warranty item in for repair.

Ordering Additional Pagers

Call Long Range Systems at 800.437.4996 or 214.553.5308 to place your order.

Loss Deterrent and Recovery

Return address labels on the back of all of your equipment are highly recommended. Should any of your pagers be taken off premise, this will help them find their way back to you. You may order return address labels from LRS or print them yourself.

WARRANTY

Long Range Systems, LLC. warrants this product against any defects that are due to faulty material or workmanship for a one-year period after the original date of consumer purchase of the complete paging system (transmitter, pagers, and charger). This warranty does not include damage to the product resulting from accident, misuse or improper electrical connection. If this product should become defective within the warranty period, we will repair or replace with equivalent product, free of charge. We will return your product, transportation charges prepaid standard FedEx Ground shipping, provided the product is shipped prepaid to:

Long Range Systems, LLC.
4550 Excel Pkwy., Suite 200
Addison, TX 75001

No return or replacement can be received without prior authorization and the proper RMA# posted to the outside of the shipping container.

This warranty gives you specific legal rights and you may also have rights that vary from state to state.

FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

CAUTION:

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.